


Descripción

- Detector magnético tipo herradura.
- Potencia máxima de conmutación 100W/100VA.
- Protección IP67.



Tipos disponibles


140 . . .



material: PA6

Referencia	Voltaje (V)	Corriente (A)	Potencia (W/VA)	Protección IEC 529	Rango Temp. (°C)	Contacto
140 320	250	0.8	20/26	IP 67	-25...+75	B
140 230	48	0.3	3/3	IP 67	-25...+75	C


140 5..

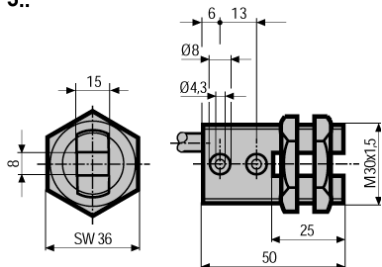

material: PA6GK30

140 510	48	0.5	10/12	IP 67	-25...+75	A
140 520	48	0.5	10/12	IP 67	-25...+75	B
140 530	48	0.5	10/12	IP 67	-25...+75	C


140 9..

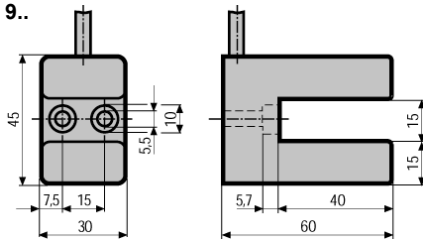

material: PA6GK30

140 910	250	0.5	50/50	IP 67	-25...+75	A
140 920	250	0.5	50/50	IP 67	-25...+75	B
140 930	150	1.0	20/20	IP 67	-25...+75	C

142 4..

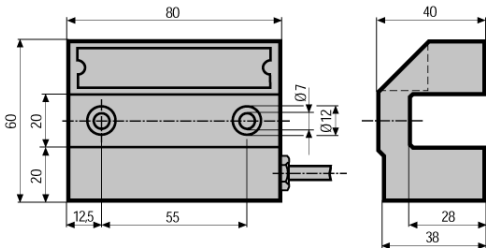

material: Zinc

142 410	250	3.0	100/100	IP 67	-25...+75	A
142 420	250	3.0	100/100	IP 67	-25...+75	B
142 430	150	0.8	40/60	IP 67	-25...+75	C

A: Contacto NA, B: Contacto NC, C: Contacto conmutado