





Tipos disponibles

Sensores para las unidades centrales de control 462 12. G1/462 121 E../H../463 12..


161 271*/ 161 271 AA*

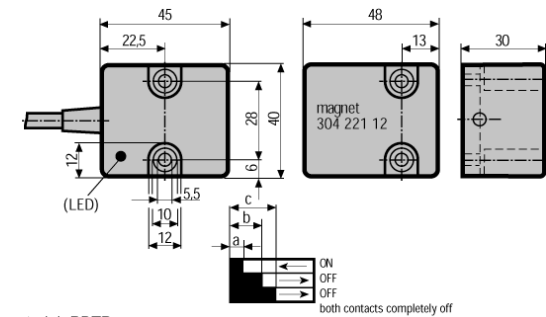

161 271 AB/ 161 271 AC

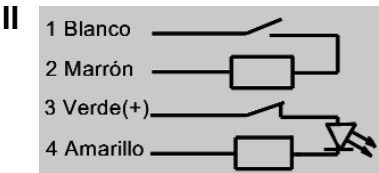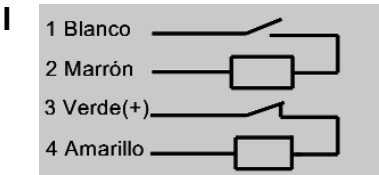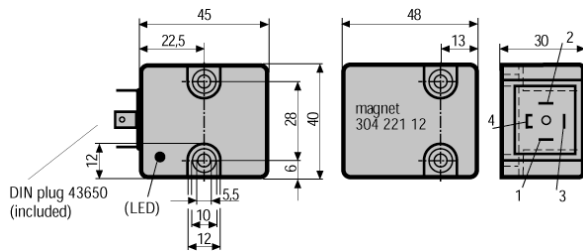

161 271 A0D*/ 161 271 A0E*

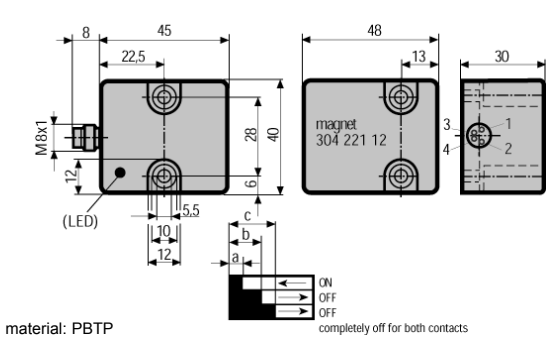


* Sensores con certificación UL

Referencia	Protección	Indicación	Espacios de aire para conmutación segura			Diagrama de circuito	Rango	Imanes compatibles
	Clase IEC 529		a (mm)	b (mm)	c (mm)		Temp (°C)	
161 271	IP 67	-	$> 0.5 / \leq 4$	11	16	I	- 25 ... +75	304 221 12.
161 271 AA	IP 67	LED	$> 0.5 / \leq 4$	11	16	II	- 25 ... +75	304 221 12.
161 271 AB	IP 67	-	$> 0.5 / \leq 4$	11	16	I	- 25 ... +75	304 221 12.
161 271 AC	IP 67	LED	$> 0.5 / \leq 4$	11	16	II	- 25 ... +75	304 221 12.
161 271 A0D	IP 67	-	$> 0.5 / \leq 4$	11	16	I	- 25 ... +75	304 221 12.
161 271 A0E	IP 67	LED	$> 0.5 / \leq 4$	11	16	II	- 25 ... +75	304 221 12.

Tipos disponibles


Sensores para las unidades centrales de control 462 12. G1/462 121 E../H../463 12..

165 270*/ 165 270 AA*

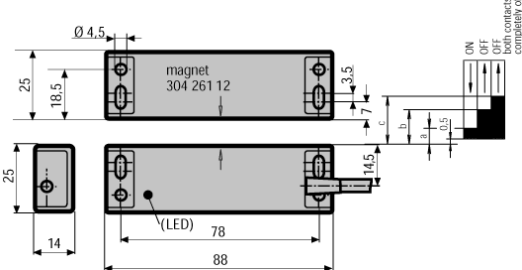


material: PBTP

165 270 Q

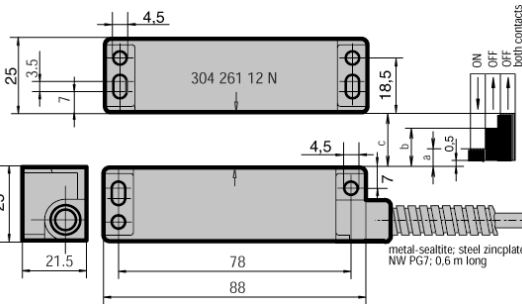

material: PBTP


165 270 R

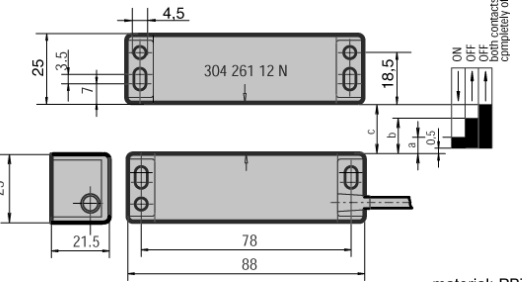

material: PBTP


I

1 Blanco
2 Marrón
3 Verde(+)
4 Amarillo



II

1 Blanco
2 Marrón
3 Verde(+)
4 Amarillo




* Sensores con certificación UL

Referencia	Protección	Indicación	Espacios de aire para conmutación segura			Diagrama de circuito	Rango	Imanes compatibles
	Clase IEC 529		a (mm)	b (mm)	c (mm)		Temp (°C)	
165 270	IP 67	-	> 0.5 / ≤ 4	11	16	I	- 25 ... +75	304 261 12
165 270 AA	IP 67	LED	> 0.5 / ≤ 4	11	16	II	- 25 ... +75	304 261 12
165 270 Q	IP 67	-	> 0.5 / ≤ 4	11	16	I	- 25 ... +75	304 261 12 N
165 270 R	IP 67	-	> 0.5 / ≤ 4	11	16	I	- 25 ... +75	304 221 12 N



Tipos disponibles

Sensores para las unidades centrales de control 462 12. G1./462 121 E../H../463 12..

165 270 A0D*/ 165 270 A0E*

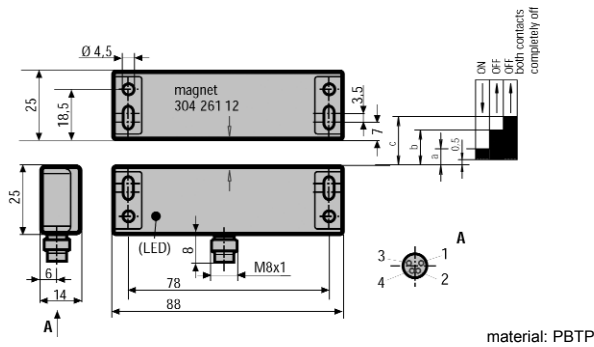

165 270 A0P/ 165 270 AAP

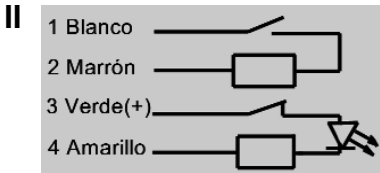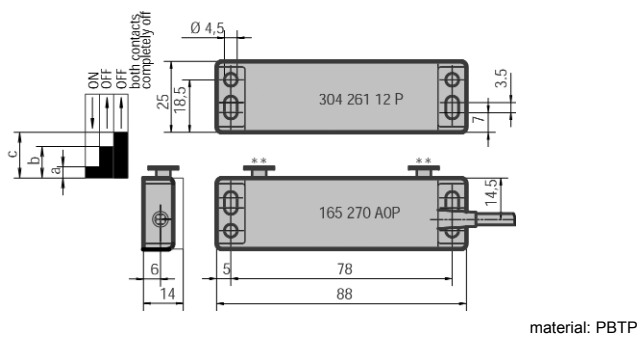

* Sensores con certificación UL

Referencia	Protección	Indicación	Espacios de aire para conmutación segura			Diagrama de circuito	Rango	Imanes compatibles
	Clase IEC 529		a (mm)	b (mm)	c (mm)		Temp (°C)	
165 270 A0D	IP 67	-	$> 0.5 / \leq 4$	11	16	I	- 25 ... +75	304 261 12
165 270 A0E	IP 67	LED	$> 0.5 / \leq 4$	11	16	II	- 25 ... +75	304 261 12
165 270 A0P	IP 67	-	$> 0.5 / \leq 4$	11	16	I	- 25 ... +75	304 261 12P
165 270 AAP	IP 67	LED	$> 0.5 / \leq 4$	11	16	II	- 25 ... +75	304 261 12P

