


0225267



Function Diagram

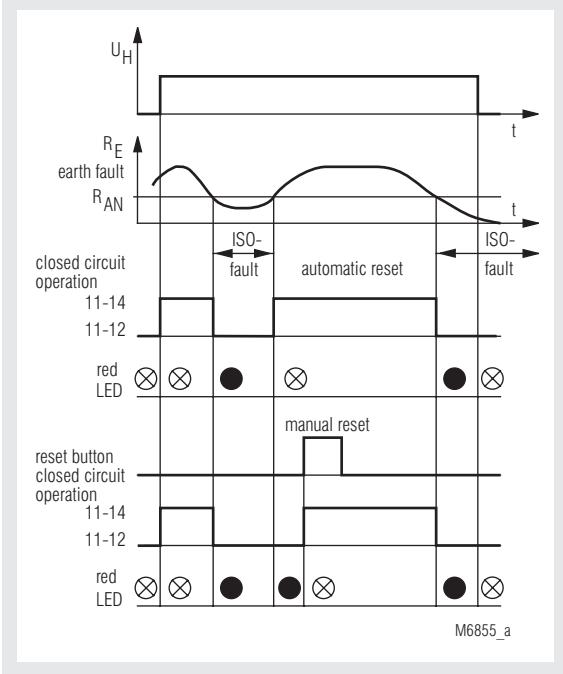

- According to IEC/EN 61 557
- For mixed AC - DC systems
- Fixed response value R_{AN}
- Optionally open or closed circuit operation
- Programmable for:
 - manual reset (bridge X5 - LT1)
 - automatic reset (without bridge)
- Internal reset button
- External reset and test button can be connected
- LED indicator
- 1 changeover contact
- External connection of indicating instrument possible
- Width 100 mm

Approvals and Marking



Applications

Monitoring of the resistance to earth in ungrounded mixed AC - DC systems

Indicators

LED chain: shows actual resistance to ground
 red LED: on, when ground fault

Notes

The device can be connected on the AC or on DC side of a mixed voltage system and monitors the ground fault on the AC and also on the DC side with the same response sensitivity. When connected on the AC side, the unit requires 3-phase connection.

The AN 5873 connects an alternating measuring voltage to the monitored voltage system. This voltage has a low frequency with a time period of 2 ... 16 sec. so that a fast changing mains voltage could lead to a fault. When the mains is back to normal this fault is reset.

Technical Data

Auxiliary circuit

Auxiliary voltage U_H : AC 230, others on request
Voltage range: 0.8 ... 1.2 U_N
Frequency range: 40 ... 400 Hz

Measuring Circuit

Nominal voltage U_N:	3 AC 24 ... 690 V / DC 1 000 V
Voltage range:	0.8 ... 1.15 U_N / 0 ... 1.15 U_N
Frequency range:	40 ... 60 Hz
Response value R_{AN}:	50 k Ω , 10 ... 440 k Ω on request
Setting R_{AN}:	fixed
Internal AC resistance:	> 350 k Ω
Internal DC resistance:	> 350 k Ω
Measuring voltage:	approx. +/- 13 V
Max. measuring current ($R_E = 0$):	< 0.3 mA
Max. permissible noise DC voltage:	DC 1000 V
Measuring cycle internally adjustable:	2 ... 16 s
Line capacitance CE to ground:	1 ... 20 μ F
factory setting:	2 s (for $CE = 1 \mu$ F)

Technical Data

Operate delay
at $R_{AN} = 50 \text{ k}\Omega$, $CE = 1 \mu\text{F}$

R_E from ∞ to $0.9 R_{AN}$:

< 15 s

R_E from ∞ to $0 \text{ k}\Omega$:

< 10 s

Hysteresis

at $R_{AN} = 50 \text{ k}\Omega$:

approx. 5 %

Measuring error

at $R_{AN} = 50 \text{ k}\Omega$:

< 10 %

ambient temperature $-5 \dots 50^\circ\text{C}$,
within the permitted voltage range

approx. 4 VA

Nominal consumption:

Phase failure bridging:

> 40 ms

Output

Contacts

AN 5873.11:

1 changeover contact

Max. switching voltage:

AC 250 V

Thermal current I_{th} :

8 A

Switching capacity

to AC 15

NO contact:

3 A / AC 230 V IEC/EN 60 947-5-1

NC contact:

1 A / AC 230 V IEC/EN 60 947-5-1

Short circuit strength

max. fuse rating:

6 A gL

IEC/EN 60 947-5-1

General Data

Operating mode:

Continuous operation

Permissible ambient and stocking temperature:

- 20 ... + 60°C / - 25 ... + 70°C

Clearance and creepage distances

rated impuls voltage /

pollution degree:

EMC

Electrostatic discharge:

8 kV (air) IEC/EN 61 000-4-2

Fast transients:

2 kV IEC/EN 61 000-4-4

Surge voltages

between

wires for power supply:

2 kV IEC/EN 61 000-4-5

between wire and ground:

4 kV IEC/EN 61 000-4-5

Interference suppression:

Limit value class B EN 55 011

Degree of protection

Housing:

IP 40 IEC/EN 60 529

Terminals:

IP 20 IEC/EN 60 529

Housing:

Thermoplastic with V0 behaviour

according to UL subject 94

Vibration resistance:

Amplitude 0.35 mm IEC/EN 60 068-2-6

frequency 10 ... 55 Hz IEC/EN 60 068-1

Climate resistance:

20 / 060 / 04 IEC/EN 60 068-1

Terminal designation:

EN 50 005

Wire connection:

2 x 2.5 mm² solid or

2 x 1.5 mm² stranded wire with sleeve

DIN 46 228-1/-2/-3/-4

Wire fixing:

Flat terminals with self-lifting

clamping piece IEC/EN 60 999-1

Mounting:

DIN rail IEC/EN 60 715

Weight:

500 g

Dimensions

Width x height x depth:

100 x 78 x 115 mm

Standard Type

AN 5873.11/102 AC230 V 50 kΩ

Article number:

0032573

stock item

• Output:

1 changeover contact

• Auxiliary voltage U_H :

AC 230 V

• Response value R_{AN} :

50 kΩ

• Closed circuit operation

100 mm

Variants


AN 5873.11/101:

open circuit operation

AN 5873.11/102:

closed circuit operation

Ordering example for variants

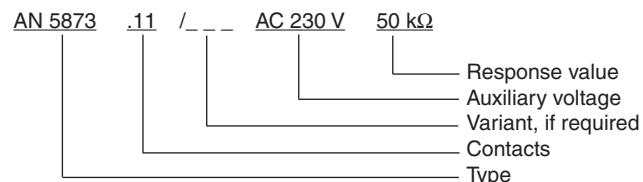

Accessories

AG 5876.11/031:

pre-warning device
indicating instrument,
degree of protection: IP 52

EH 5861/004:


The indicating device EH 5861 is externally connected to the insulation monitor and shows the actual insulation resistance of the voltage system to ground.

Dimensions:

Width x height x depth

96 x 96 x 52 mm

Connection Example

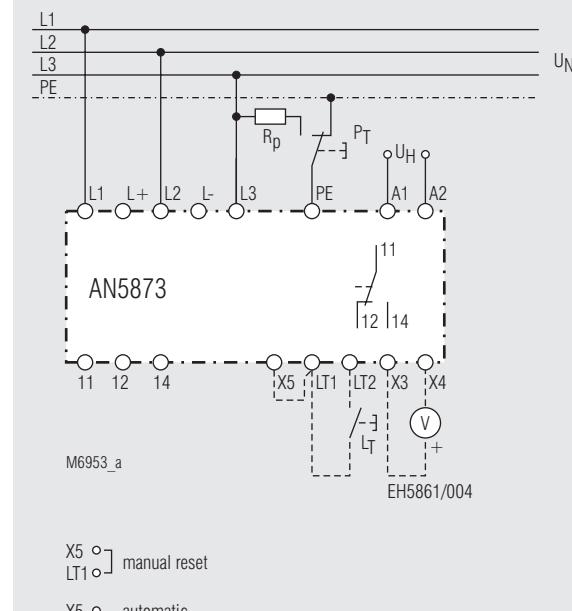

L1/L2/L3 or L+/L-: U_N

A1/A2: U_H