



VARIMETER Asymmetry Relay BA 9042, AI 942

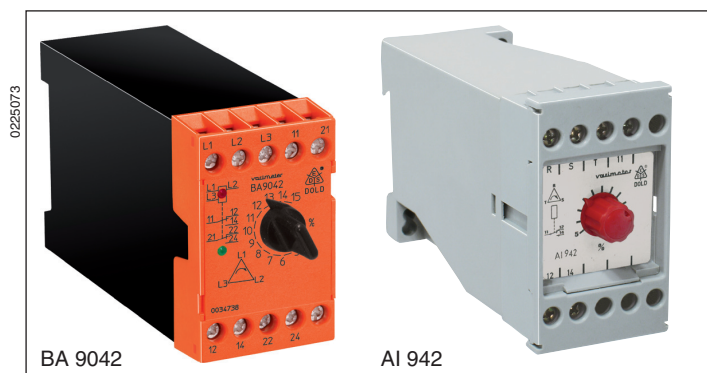

- According to IEC 255, EN 60 255, VDE 0435 part 303
- For nominal voltage from 3 AC 230 V to 500 V
- Detection of
 - voltage asymmetry
 - wrong phase sequence
 - phase failure
- Detection of feedback voltage
- BA 9042 optionally with adjustable time delay
- Closed circuit operation
- BA 9042 LED indicators for operation and state of contacts
- Width 45 mm

Function Diagram

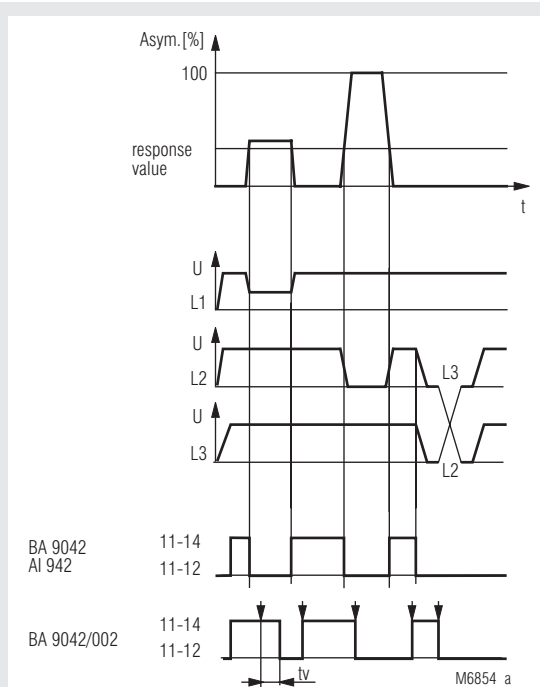

Approvals and Marking



Application

Monitoring three-phase mains for voltage asymmetry, phase failure or incorrect phase sequence.

Function

The device responds to unsymmetric voltage changes, which can occur because of unbalanced load or phase failure (blown fuse). An asymmetry relay detects only the voltage difference between 2 phases and does not react on symmetric undervoltage.

Indicators


BA 9042
red LED: on, when supply voltage connected
green LED: on, when output relay energized

Notes

On ambient temperature > 20 °C overvoltage together with max. thermal current is not allowed. In industrial voltage systems with high harmonic content (content > 2 %) measuring faults can occur. Harmonics in industrial systems are caused by thyristor controls, emergency power supplies, reactive current compensators, etc.

Normally the harmonic content of a voltage system is unknown. We recommend therefore to test a sample in the actual circuit which we can provide with the right to return. If problems occur during the test we are able to offer other solutions.

Circuit Diagram



BA 9042 / AI 942

Technical Data

Input

Nominal voltage U_N : 3 AC 230, 240, 400, 415, 440, 500 V
Voltage range: 0.8 ... 1.1 U_N
Nominal consumption: ≤ 3.8 VA
Nominal frequency: 50 or 60 Hz
Frequency range: ± 5 %

Setting ranges

Setting range: 5 ... 15 % voltage asymmetry, settable

Hysteresis

BA 9042 : > 0.98

Voltage feedback recognition:

up to 100 % - setting value,
 e.g. when setting value = 5 %
 asymmetry, 100 % - 5 % = 95 %
 Recognition of voltage feedback
 up to 95 %

Technical Data	
Output	
Contacts	
BA 9042:	2 changeover contacts
AI 942.001:	1 changeover contact
AI 942.002:	2 changeover contacts
Release delay: (at phase failure or asymmetry)	≤ 150 ms
	If the voltage system becomes again symmetric before 150 ms the contacts may switch
Operate delay: (delay of the contacts when switching on)	≤ 500 ms
Thermal current I_{th}:	6 A
Switching capacity to AC 15	
NO contact:	3 A / AC 230 V IEC/EN 60 947-5-1
NC contact:	1 A / AC 230 V IEC/EN 60 947-5-1
Electrical life to AC 15 at 3 A, AC 230 V	IEC/EN 60 947-5-1
AI 942.001:	≥ 5 x 10 ⁵ switching cycles
to AC 15 at 1 A, AC 230 V	IEC/EN 60 947-5-1
BA 9042.12, AI 942.002:	≥ 2.5 x 10 ⁵ switching cycles
Short-circuit strength max. fuse rating:	4 AgL IEC/EN 60 947-5-1
Mechanical life:	> 30 x 10 ⁶ switching cycles
General Data	

Operating mode:	Continuous operation	
Temperature range:	- 20 ... + 60°C	
Clearance and creepage distances		
rated impuls voltage / pollution degree	4 kV / 2	IEC 60 664-1
EMC		
Electrostatic discharge:	8 kV (air)	IEC/EN 61 000-4-2
Fast transients:	2 kV	IEC/EN 61 000-4-4
Surge voltages between		
wire for powers supply:	1 kV	IEC/EN 61 000-4-5
between wire and ground:	2 kV	IEC/EN 61 000-4-5
Interference suppression:	Limit value class B	EN 55 011
Degree of protection		
Housing:	IP 40	IEC/EN 60 529
Terminals:	IP 20	IEC/EN 60 529
Housing:	Thermoplastic with V0 behaviour according to UL subject 94	
Vibration resistance:	Amplitude 0.35 mm	IEC/EN 60 068-2-6
	frequency 10 ... 55 Hz	
Climate resistance:	20 / 060 / 04	IEC/EN 60 068-1
Terminal designation:	EN 50 005	
Wire connection:	2 x 2.5 mm ² solid or 2 x 1.5 mm ² stranded wire with sleeve	
	DIN 46 228-1/-2/-3/-4	
Wire fixing:	Flat terminals with self-lifting clamping piece	
	IEC/EN 60 999-1	
Mounting:	DIN rail	
	IEC/EN 60 715	
Weight		
BA 9042:	310 g	
AI 942:	300 g	

Dimensions

Width x height x depth	
BA 9042:	45 x 73 x 132 mm
AI 942:	45 x 77 x 127 mm

Standard Type	
BA 9042 3 AC 400 V 50 Hz	
Article no.:	0040770 stock item
• Output:	2 changeover contacts
• Nominal voltage U _N :	3 AC 400 V
• Width:	45 mm

Variant

BA 9042/002:	with time delay t _v = 0.5 ... 10 s on asymmetry detection
--------------	--

Ordering example for variant

BA 9042	/002	3 AC 400 V	50 Hz	
				Nominal frequency
				Nominal voltage
				Variant, if required
				Type
AI 942	.001	3 AC 400 V	50 Hz	
				Nominal frequency
				Nominal voltage
				Contacts
				Type

Accessories

AI 942:	
K 70-34:	Cover