

Installation- / Monitoring Technique


VARIMETER

Speed Monitor


IK 9055, IL 9055, SK 9055, SL 9055

DOLD 


0265348

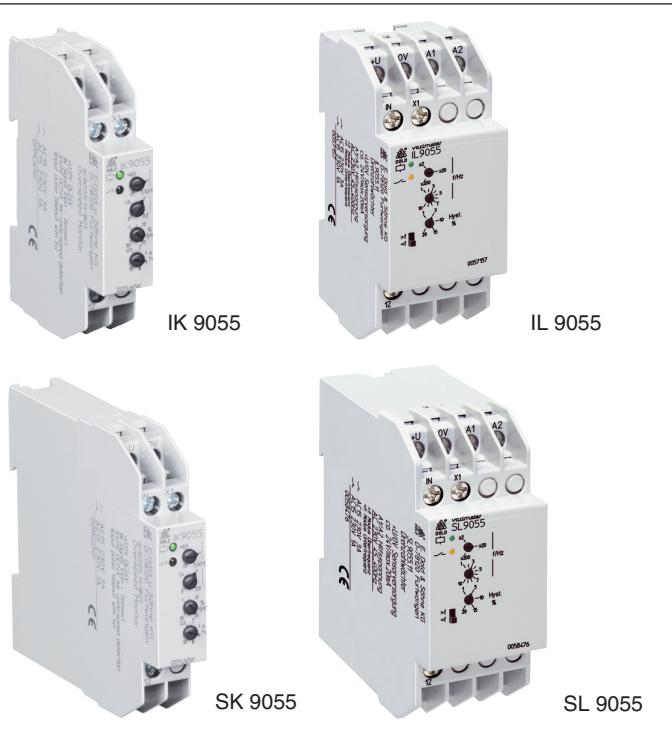

Function Diagram

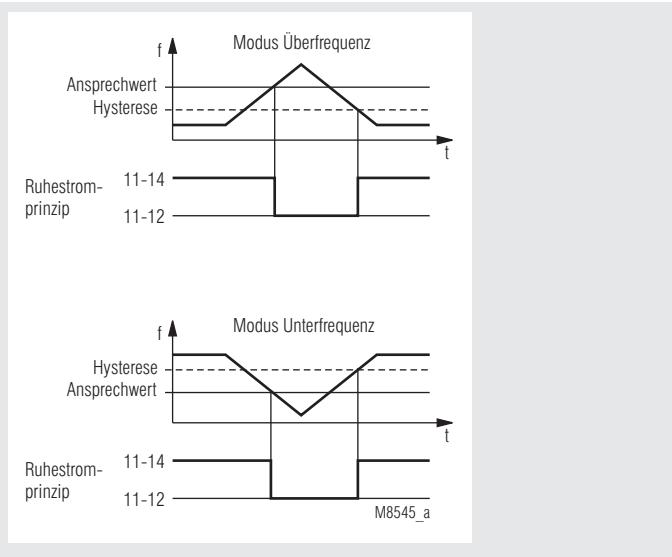

Circuit Diagrams

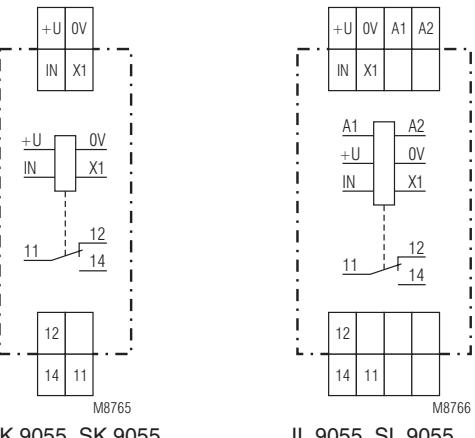

IK 9055, SK 9055

IL 9055, SL 9055

Your Advantage

- Protection of persons, machines and products
- Easy setting
- Universal input, for configuration of different sensors (PNP, NPN, 2-wire, contact, voltage)

Features

- According to IEC/EN 60 255, DIN VDE 0435-303
- Detection of over- or underspeed or frequency, function selectable
- 3 selectable ranges for frequency or speed, adjustable tripping value
- Ranges up to 10 kHz (\approx 600.000 ipm) available, therefore suitable for turbines, centrifuges and similar applications
- Adjustable hysteresis
- Input also suitable for SKF sensor bearings
- As option for Namur sensors
- As option for permanent magnet sensors
- As option with adjustable switching delay/start up delay
- On request with manual reset
- IK 9055 and SK 9055: compact version for DC 24 V auxiliary supply
- IL 9055 and SL 9055: for auxiliary supply up to AC 400 V with galvanic separation to sensor input
- De-energized on trip (Energized on trip on request)
- LED indicators for auxiliary supply, sensor pulses and contact position
- 1 changeover contact (2 changeover on request)

Devices available in 2 enclosure versions:

IK/IL 9055: depth 59 mm, with terminals at the bottom for installation systems and industrial distribution systems according to DIN 43 880

SK/SL 9055: depth 98 mm, with terminals at the top for cabinets with mounting plate and cable duct

- IK 9055, SK 9055: width 17.5 mm
- IL 9055, SL 9055: width 35 mm

Approvals and Marking



* see variants

Applications

Speed monitoring on rotating machine parts, monitoring of cyclic movements, general monitoring of pulse sequences (transportation, conveyors production systems), monitoring of pulse frequency (e.g. flow sensors, anemometers)

Function

The frequency to be monitored is connected to the input terminal IN. It is compared to the adjusted tripping value.

In overfrequency mode, the output relay switches into alarm position when the preset response value is exceeded. When the system frequency once more falls below the response value minus the preset hysteresis, the output relay will switch back into normal position.

In underfrequency mode, the output relay switches into alarm position when the actual value falls below the preset response value. When the system frequency once more exceeds the response value plus hysteresis, the output relay will switch back into normal position.

If de-energized on trip is selected, the output relay is energized (11-14 closed) in normal status. If energized on trip is selected, the output relay is energized (11-14 closed) in alarm status.

Indicators

Green LED: On, when only auxiliary voltage connected to A1-A2, intermittent red/green flashing when pulses are on the input IN

Yellow LED: On, when the output relay is energized (contacts 11-14 closed)

Notes

To the universal input of the speed monitor (terminals +U, X1, IN, 0V) a wide range of different sensors can be connected (capacitive, inductive, ultrasonic, hall effect, optical, reed, etc.) The input is suitable for proximity sensors according to IEC/EN 60 947-5-2 (VDE 0660, part 208). Depending on the type of sensor (3-wire PNP or NPN, 2-wire, contact, voltage) the connection is made to different terminals (see Connection Examples). The models IL and SL 9055 have a galvanic separation between Input Circuit (+U, X1, IN, 0V) and auxiliary supply (A1, A2 e.g. 230 V AC). 24 V DC with up to 20 mA is provided on the terminals U+/0V for the supply of the sensor.

If sensors with higher power consumption are used, the model IK and SK 9055 is suitable, where the sensors and the speed monitor are supplied by DC 24 V from an external power supply.

The speed monitors can be operated with SKF sensor bearings. Sensor bearings include ball bearing and speed sensor in a compact way. The actual sensors are hall effect sensors with NPN output. The connection is made as with NPN proximity sensors.

The model /200 is optimised for Namur proximity sensors according to IEC 60 947-5-6 (VDE 0660 part 212, previously EN 50 227/ DIN 19 234). Namur sensors are 2-wire sensors with defined current in on and off state. The model /300 is designed to connect permanent magnet sensors. Permanent sensors are simple, robust 2-wire sensors without voltage supply and electronic circuits. They generate an induced voltage while the permanent magnet passes. They are very cost effective and can be used also with high temperature and hard ambient conditions.

Monitoring indicator of sensor input

The upper 2-coloured LED shows the connected supply voltage and the status of the sensor:

Green:	input IN on LOW level
Red:	input IN on HIGH level
Green/Red:	pulses on input IN

Several devices on one sensor

A parallel connection of several monitors to one sensor is possible without problems on the universal input, when several tripping values are required or a range between two limits should be monitored. The corresponding terminals are connected in parallel.

Monitoring function over- or underfrequency

The function can be changed by a slide switch on the front of the unit. Energized on trip or de-energized on trip remains the same when changing the function, also the tripping value remains unchanged. No calculations with hysteresis are necessary.

Hysteresis setting

When the setting value is very low in the lowest range, the hysteresis should not be adjusted to the minimum in order to avoid cycling of the output relay.

In the operating mode underfrequency (f) at setting values near to the end of the range the hysteresis can only be set to 4 ... 10 % due to the internal circuit. When there are problems, the next higher range should be selected.

Reaction time

The unit works with an integrating measuring principle, where the mean value of several input pulse periods is calculated. This avoids problems with interference pulses, but the reaction time gets longer. The reaction time relates to the lowest adjustable frequency on the actual unit.

An approximate calculation is: Time constant (τ) $\approx \frac{2.5}{f_{\min}}$

The time constant (τ) is the time after which a change of the input frequency with 63 % influences the calculation. If the input frequency before the change is near to the switching value or the change of the frequency is very low, the reaction time can be shorter than the time constant. The technical data will show always the time constant.

Special models with shorter time constant (limited frequency range) on request.

Maximum input frequency, minimum pulse and space time

Every frequency measuring device detects input pulses only up to a certain maximum input frequency. (This is also a result of a proper interference suppression.) If the input frequency is higher than the maximum value, the input pulses are not longer detected. The monitor detects frequency 0.

Notes

The maximum frequency is always much higher than the maximum setting value of the highest setting range (see technical data).

Also the maximum switching frequency of the sensors must be observed. In addition every frequency input needs a certain minimum pulse and space duration of the connected sensor to react properly. This is very important with high frequency and a low or high pulse/space ratio (e.g. a small active area on big diameter or a small gap on big diameter at high rotation speed). If a frequency near to the maximum speed should be detected a pulse/space ratio of 1:1 should be provided by designing the rotating part accordingly. Pulse time is the time the high signal is present at the IN terminal, space time is the time the low signal is present on the IN terminal.


When using PNP sensors or contacts connected to +U the pulse time is identically with the on time of the sensor or contact.

The minimum pulse or space time are very short on these modules, so that most applications are uncritical (see technical data).

Variants with delay or start up delay

Devices with adjustable switching delay or start up delay can be made. The start up delay is started when connecting the auxiliary supply, during this time no frequency measurement is done. This may be useful in application for underspeed monitoring when the speed monitor is started up with the motor which needs some time to get on operation speed. Without start up delay there would be an alarm when before the motor is on speed. Compared with the standard switching delay a start up delay has the advantage that it only works one time on start up, but after that a change is detected immediately. If the start up delay is not required, (e.g. on function overspeed), the potentiometer "t/s" is set to left end (minimum).

Set-up

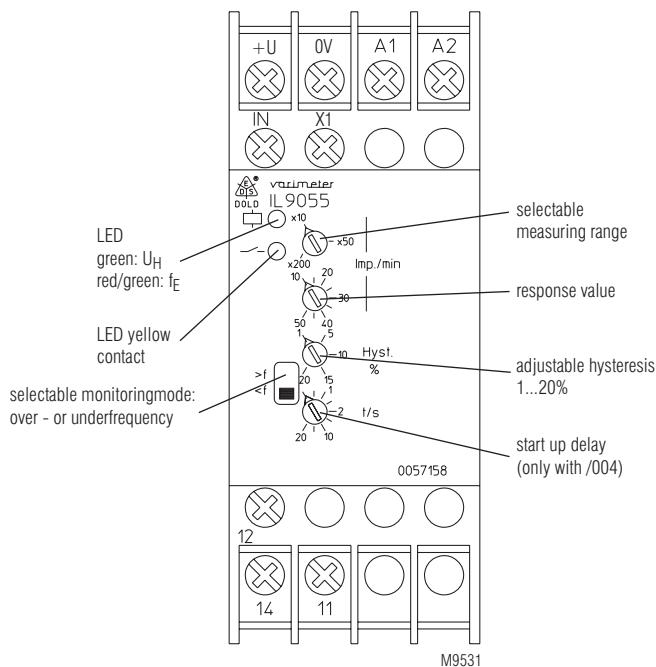

Technical Data

Input Circuit

Universal input:	for PNP-, NPN-, 2-wire sensors, contacts and voltage suitable for proximity sensors according to IEC/EN 60 947-5-2 (VDE 0660 part 208)
IK 9055, SK 9055:	sensor supply by external auxiliary voltage DC 24 V
IL 9055, SL 9055:	built in power supply approx. DC 24 V, max. 20 mA
Max. residual current of 2-wire sensors:	2 mA (OFF)
Max. voltage drop of 2-wire sensors:	8 V (ON)
Voltage drive	approx. 17 kΩ
input resistance:	approx. 17 kΩ
Threshold Low	approx. 9.2 V
IK 9055, SK 9055:	approx. 9.2 V
IL 9055, SL 9055:	approx. 8.4 V
Threshold High	approx. 11 V
IK 9055, SK 9055:	approx. 11 V
IL 9055, SL 9055:	approx. 10.2 V

NAMUR Input

IK 9055/200, SK 9055/200, IL 9055/200, SL 9055/200:	für NAMUR-sensors according to IEC/EN 60 947-5-6 (VDE 0660 part 212) (previously EN 50227/DIN 19234)
No-load operation voltage:	approx. 8.2 V
Input resistance:	1 kΩ
Short circuit current:	approx. 8 mA
Switching thresholds:	Low approx. 1.5 mA High approx. 1.8 mA

Input

IK 9055/300, SK 9055/300, IL 9055/300, SL 9055/300:	for permanent magnet sensors
Input resistance	approx. 50 kΩ
at $f < 100$ Hz:	approx. kΩ
at $f = 2$ kHz:	approx. kΩ
Input sensitivity	approx. 50 mV _{eff.} (at $f < 500$ Hz) approx. 20 mV _{eff.} (at $f < 250$ Hz)
Max. input voltage:	80 V _{eff.}
Monitoring mode:	overfrequency („>f“) or underfrequency („<f“) selectable via slide switch
Response value:	frequency ranges each 3-fold, selectable via rotary switch

Technical Data

Frequency range:

100 ... 500	50 ... 500	2 ... 20	10 ... 100
500 ... 2500	500 ... 5000	20 ... 200	100 ... 1000
2000 ... 10000	5000 ... 50000	200 ... 2000	1000 ... 10000
Impulse/min	Impulse/min	Hz	Hz

Fineadjustment range:

infinitely 1:5	infinitely 1:10	infinitely 1:10	infinitely 1:10
----------------	-----------------	-----------------	-----------------

Max. input frequency

(Pulse: break = 1:1):	5 kHz	5 kHz	15 kHz
-----------------------	-------	-------	--------

Min. pulse- and breaktime:

150 µs	150 µs	150 µs	50 µs
--------	--------	--------	-------

Time constant τ measuring circuit:

approx. 1.4 s	approx. 3 s	approx. 1.4 s	approx. 0.2 s
---------------	-------------	---------------	---------------

Hysteresis

adjustable infinitely:	1 ... 20 % of the adjusted response value
------------------------	---

Start up delay

IK 9055/004, SK 9055/004, IL 9055/004, SL 9055/004	adjustable logarithmically:
	0.1 ... 20 s

Auxiliary Circuit

IK 9055, SK 9055

(terminal connection +U/0V):

DC 24 V

19.2 ... 30 V

nominal consumption: max. approx. 0.8 W

IL 9055, SL 9055

(terminal connection A1/A2):

AC 24 V, 48 V, 230 V (others on request)

nominal voltage U_H :

0.8 ... 1.1 U_H

nominal consumption: approx. 4 VA

frequency range: 45 ... 400 Hz

Output

Contacts: 1 changeover contact

4 A

Thermal current I_{th} :

Switching capacity to AC 15

NO contacts: 3 A / AC 230 V IEC/EN 60 947-5-1

NC contacts: 1 A / AC 230 V IEC/EN 60 947-5-1

Switching capacity to DC 13

NO/NC contacts: 1 A / DC 24 V IEC/EN 60 947-5-1

Electrical life

to AC 15 at 1 A / 230 V: 1.5 x 10⁶ switching cycles IEC/EN 60 947-5-1

Short circuit strength

max. fuse rating: 4 A gL IEC/EN 60 941-5-1

Mechanical life: ≥ 30 x 10⁶ switching cycles

General Data

Operating mode: Continuous operation

Temperature range (operation): -20 ... +60 °C

Clearance and creepage distances

rated impuls voltage/ pollution degree: 4 kV/2 IEC 60 664-1

EMC

Electrostatic discharge: 8 kV (air) IEC/EN 61 000-4-2

Fast transients: 2 kV IEC/EN 61 000-4-4

Surge voltages: 1 kV IEC/EN 61 000-4-5

HF-wire guided: 10 V IEC/EN 61 000-4-6

Interference suppression: Limit value class B EN 55 011

Degree of protection

Housing: IP 40 IEC/EN 60 529

Terminals: IP 20 Thermoplastic with V0 behaviour

Housing: according to UL subject 94

Vibration resistance: Amplitude 0.35 mm, Frequency 10...55Hz, IEC/EN 60 068-2-6

Climate resistance: 20 / 060 / 04 IEC/EN 60 068-1

Terminal designation: DIN EN 50 005

Technical Data

Wire connection:	2 x 2.5 mm ⁵ solid or 2 x 1.5 mm ² stranded wire with sleeve	DIN 46 228 DIN 46 228-1/-2/-3
Wire fixing:	Flat terminals with self-lifting clamping piece	IEC/EN 60 999
Mounting:	DIN rail	IEC/EN 60 715
Weight		
IK 9055:	approx. 65 g	
SK 9055:	approx. 85 g	
IL 9055:	approx. 140 g	
SL 9055:	approx. 160 g	

Dimensions

Width x height x depth

IK 9055:	17.5 x 90 x 59 mm
SK 9055:	17.5 x 90 x 98 mm
IL 9055:	35 x 90 x 59 mm
SL 9055:	35 x 90 x 98 mm

Standard Types

IK 9055.11/60	50 ... 50000 lpm	U_H DC 24 V	Hysteresis 1 ... 20 %
Article number:	0059786		
• Universal input for PNP-, NPN-, 2-wire sensors, contacts, voltage			
• Selectable function:	over- or underfrequency		
• 3-fold selectable ranges 50 ... 500 lpm, 500 ... 5000 lpm, 5000 ... 50000 lpm			
• Response value infinitely adjustable 1:10			
• Hysteresis adjustable:	1 ... 20 %		
• Auxiliary voltage U_H :	DC 24 V		
• De-energized on trip			
• Output:	1 changeover contact		

IL 9055.11/60	2 ... 2000 Hz	U_H AC 230 V	Hysteresis 1 ... 20 %
Article number:	0057157		
• Universal input for PNP-, NPN-, 2-wire sensors, contacts, voltage			
• Selectable function:	over- or underfrequency		
• 3-fold selectable ranges 2 ... 20 Hz, 20 ... 200 Hz, 200 ... 2000 Hz			
• Response value infinitely adjustable 1:10			
• Hysteresis adjustable:	1 ... 20 %		
• Auxiliary voltage U_H :	AC 230 V		
• De-energized on trip			
• Output:	1 changeover contact		

CSA-Data

Nominal voltage U_N:	
IK 9055, SK 9055:	DC 24 V
IL 9055, SL 9055:	AC 24 V, AC 48 V, AC 230 V

Ambient temperature:	-20 ... +60°C
-----------------------------	---------------

Switching capacity:	3A 240Vac
----------------------------	-----------

Wire connection:	60°C / 75°C copper conductors only AWG 20 - 14 Sol Torque 0.6 Nm AWG 20 - 16 Str Torque 0.6 Nm
-------------------------	--




Technical data that is not stated in the CSA-Data, can be found in the technical data section.

Variants

IK 9055. _ /60, SK 9055. _ /60, IL 9055. _ /60, SL 9055. _ /60:	with CSA-approval
IK 9055.11/004, SK 9055.11/004, IL 9055.11/004, SL 9055.11/004:	with adjustable start up delay 0.1 ... 20 s
IK 9055.11/200, SK 9055.11/200, IL 9055.11/200, SL 9055.11/200:	input for NAMUR sensors
IK 9055.11/300, SK 9055.11/300, IL 9055.11/300, SL 9055.11/300:	input for permanent magnet sensors

Application Example Universal Input

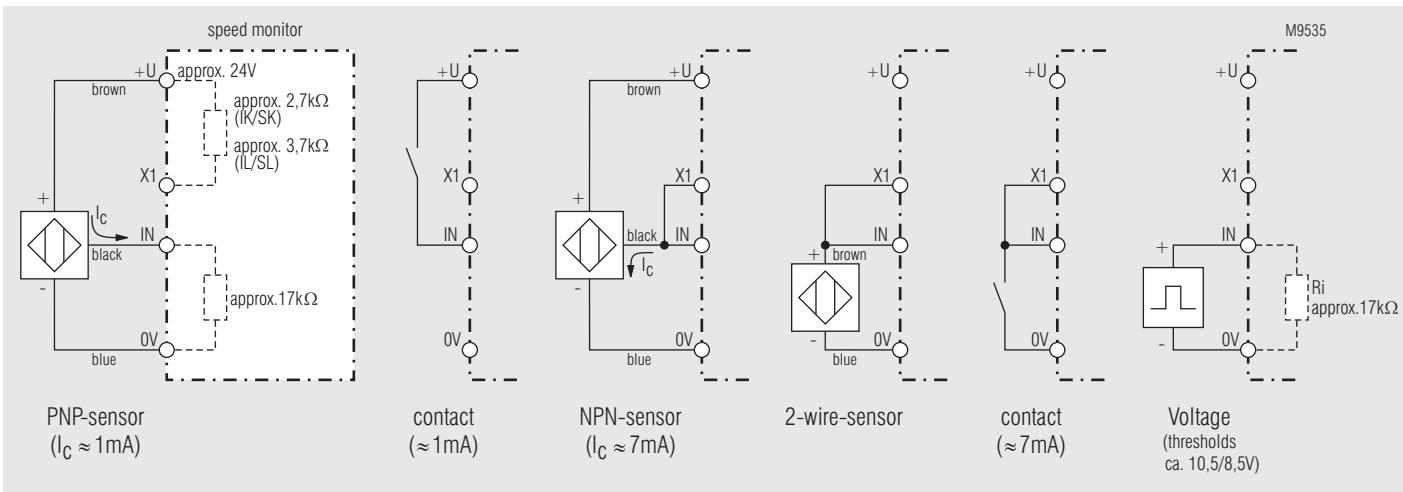

Note: For IK-models the auxiliary voltage (DC 24 V) must be additionally connected to terminals +U/0V