


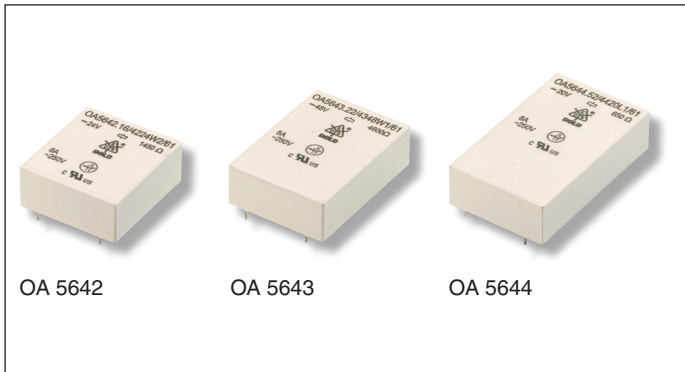

- According to DIN EN 61810-1, DIN EN 50205, DIN EN 50178, DIN EN 60664, DIN EN 50155 (for railway)
- With forcibly guided contacts
- Safe separation between coil/contact and contact/contact for applications at pollution degree 2 with rated insulation voltage 250 V
- Low nominal and holding power
- High mechanical service life
- **Extremely smallest height only 10.3 mm and minimum area**
- RoHS compliance
- Placing SMD components between PCB and relay is possible

Applications

- Switchgear for safety technology
- Press controls
- Escalators and walkways EN 115
- Elevators EN 81-1
- Railway technique

Approvals and Marking



Technical Data

Relay type		OA 5642	OA 5643	OA 5644
1.0 Relay coil				
1.1 Nominal voltage	DC V	6; 12; 21; 24; 48; 60; 110; others on request		
1.2 Nominal consumption	W	0.40	0.50	0.65
1.11 Voltage range	U _N	0.7 ... 1.6	0.7 ... 1.6	0.7 ... 1.6
1.13 Holding power (at 0,5 x U _N)	W	0.1	0.125	0.160
2.0 Contacts				
2.1 Contact arrangement		1 NO / 1 NC	2 NO / 1 NC	2 NO / 2 NC 3 NO / 1 NC
2.2 Contact material		AgSnO ₂ + 0.2 µm Au; AgNi + 0.2 µm Au, AgNi + 5 µm Au		
2.3 Rated insulation voltage	AC V	250		
Switching voltage min./max	V	AC 10; DC 10 / DC 250, AC 400 (100 mV / AC/DC 60 V) ¹⁾		
2.4 Limit. contin. current I _N max. (each contact)	A	8		
Switching current min./max	A	10 mA / 8 A (1 mA / 0.3 A) ¹⁾		
2.5 Switching power min./max.	VA	3 / 2000 (1 mVA / 7 VA) ¹⁾		
Switching power min./max	W	0.1 ²⁾ ... 240 (1 mW / 7 W) ¹⁾ (see arc limit curve under resistive load)		
2.6 Switching capacity				
to IEC/EN 60947-5-1 AC 15 ³⁾	V/A	NO 250 / 3	NC 250 / 1	
to IEC/EN 60947-5-1 AC 15 ⁴⁾	V/A	NO 250 / 5	NC 250 / 2	
to IEC/EN 60947-5-1 DC 13 ³⁾	V/A	NO 24 / 2	NC 24 / 2	
at 0,1 Hz DC 13 ³⁾	V/A	NO 24 / 4	NC 24 / 4	
to UL 508		B300 / Q300		
2.7 Electrical life		> 10 ⁵		
at AC 230 V, 8 A, cosφ = 1	switching cycles	at 1 s On, 1 s Off (see diagram)		
2.8 Switching frequency max.	switching cycles/s	20		
2.9 Response time / Release time	ms	≤ 15; typ. 10 / ≤ 5; typ. 2		
3.0 Other				
3.1 Mechanical life	switching cycles	> 40 x 10 ⁶		
3.2 Temperature range	°C	- 40 ... + 85		
3.3 Degree of protection		Wash proof RT III		
3.5 Vibration resistance		10 ... 200 Hz, a = 0,35 mm (failure crit. 10 µs) IEC/EN 60068		
3.6 Climate resistance		040 / 085 / 21 IEC/EN 60068		
3.7 Short circuit strength 1 kA / AC 250 V	AgNi or AgSnO ₂	NO: 10 AgL / NC: 6 AgL EN 60947-5-1		

¹⁾ Values for AgNi-contacts + 5 µm Au

²⁾ Typical values


³⁾ Values for AgNi

⁴⁾ Values for AgSnO₂


Technical Data					
3.8	Insulation according to IEC 60664-1				
	Rated insulation voltage	AC V	250		
	pollution degree		2		
	Overvoltage category		III		
	Test voltage				
	Contact- Coil (1 min)	AC kV eff.	≥ 4		
	Contact - Contact (1min)	AC kV eff.	≥ 4		
	Transient voltage				
	Contact- Coil (1,2 - 50 μs)	kV	≥ 6		
	Contact - Contact (1,2 - 50 μs)	kV	≥ 6		
Clearance and creepage distances					
Contact- Coil	mm	≥ 5.5			
Contact - Contact	mm	≥ 5.5			
3.9	Weight	g	approx. 14	approx. 15	approx. 16
4.0 Packing					
4.1	on cardboard in slipcase	piece	32	28	20
4.2	in case package	piece	320	280	200
5.0 Solder method					
5.1	Solder method /-temperature /-duration	°C / s	Wafer soldering / 260 / 5		

Design Versions								
		OA 5642		OA 5643		OA 5644		
U _N (DC V)	Voltage range (DC V)	R _{Coil} Ω±10%	.16	R _{Coil} Ω±10%	.22	R _{Coil} Ω±10%	.48	.52
			1NO, 1NC		2NO, 1NC		3NO, 1NC	2NO, 2NC
AgSnO ₂ -contacts + 0,2 μm Au								
6	4.2 ... 9.6	90	4231	70	4331	55	4431	4531
12	8.4 ... 19.2	370	4232	290	4332	230	4432	4532
21	15.0 ... 33.6	1050	4233	840	4333	680	4433	4533
24	16.8 ... 38.4	1450	4234	1150	4334	900	4434	4534
48	33.6 ... 76.8	6000	4235	4600	4335	3600	4435	4535
60	42.0 ... 96.0	9250	4236	7100	4336	5600	4436	4536
110	77.0 ... 176.0	31000	4237	24000	4337	18500	4437	4537
AgNi-contacts + 0.2 μm Au								
6	4.2 ... 7.8	90	4201	70	4301	55	4401	4501
12	8.4 ... 15.2	370	4202	290	4302	230	4402	4502
21	15.0 ... 27.3	1050	4203	840	4303	680	4403	4503
24	16.8 ... 31.2	1450	4204	1150	4304	900	4404	4504
48	33.6 ... 62.4	6000	4205	4600	4305	3600	4405	4505
60	42.0 ... 78.0	9250	4206	7100	4306	5600	4406	4506
110	77.0 ... 143.0	31000	4207	24000	4307	18500	4407	4507
AgNi-contacts + 5 μm Au								
6	4.2 ... 7.8	90	4221	70	4321	55	4421	4521
12	8.4 ... 15.2	370	4222	290	4322	230	4422	4522
21	15.0 ... 27.3	1050	4223	840	4323	680	4423	4523
24	16.8 ... 31.2	1450	4224	1150	4324	900	4424	4524
48	33.6 ... 62.4	6000	4225	4600	4325	3600	4425	4525
60	42.0 ... 78.0	9250	4226	7100	4326	5600	4426	4526
110	77.0 ... 143.0	31000	4227	24000	4327	18500	4427	4527


Ordering Example	
OA 5642. _ _ / _ _ _ _	W 1 / 61*)
	Pin configuration
	W = wash proof RT III
	Design version
	Contact arrangement
	.16 1 NO / 1 NC
*) / 61 cURus approval	

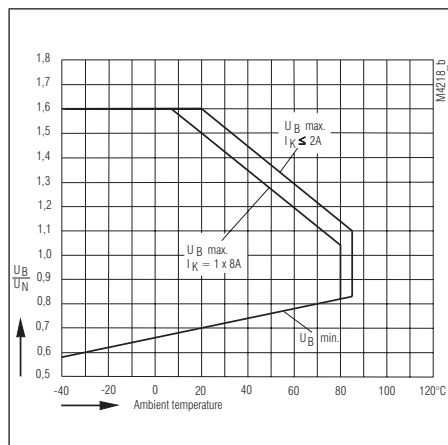


Operating voltage limit curve
OA 5642.16

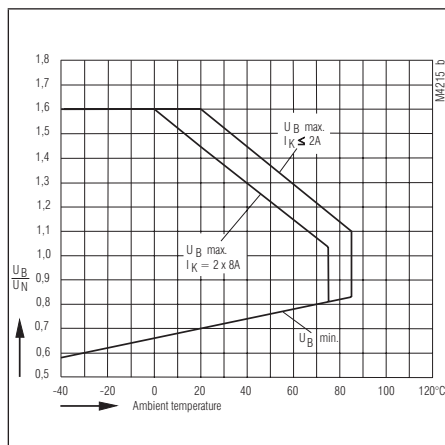


Operating voltage limit curve
OA 5644.52 und OA 5643.22

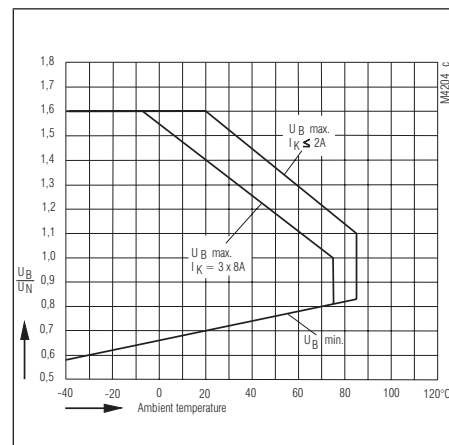


Operating voltage limit curve
OA 5644.48

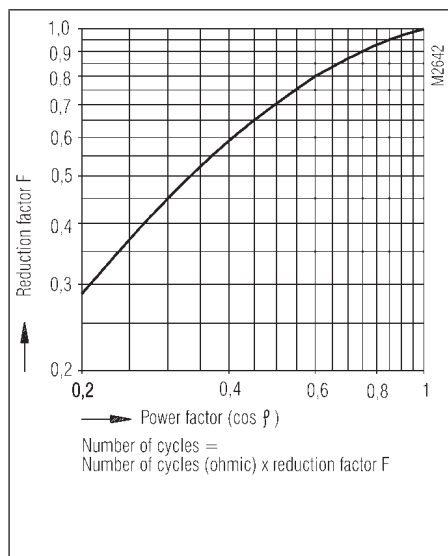

Reduction factor for inductive loads

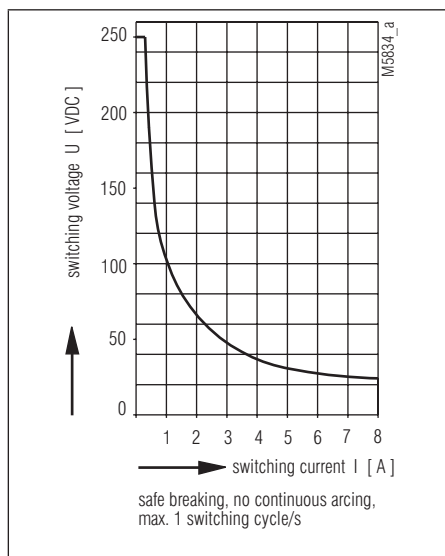


Limit curve for arc-free operat. (load limit curve)

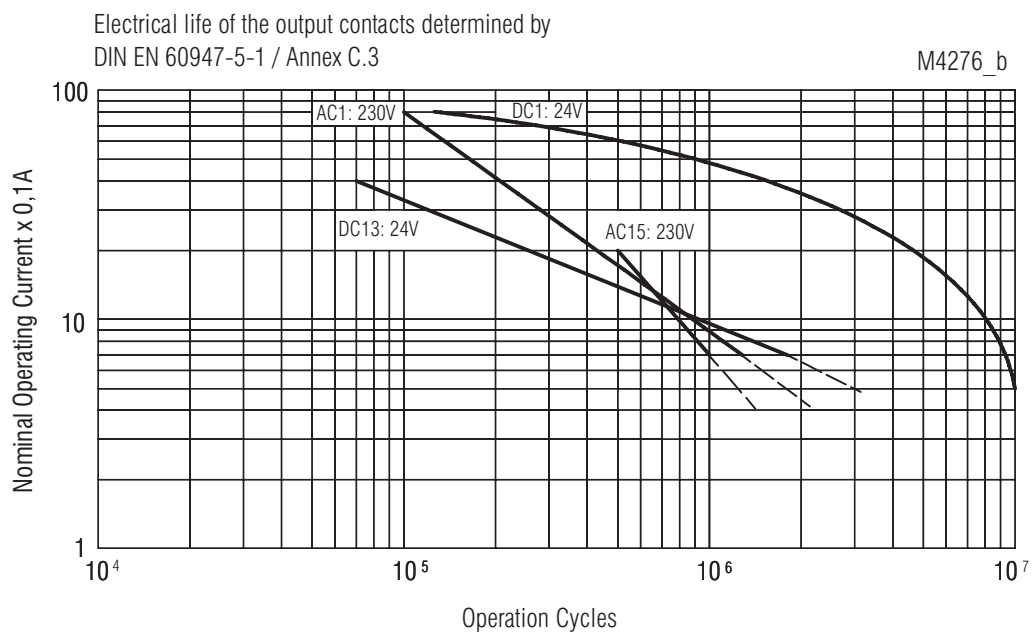


Electrical life


OA 5642 Dimensions, Pin Configuration, Connection Diagrams

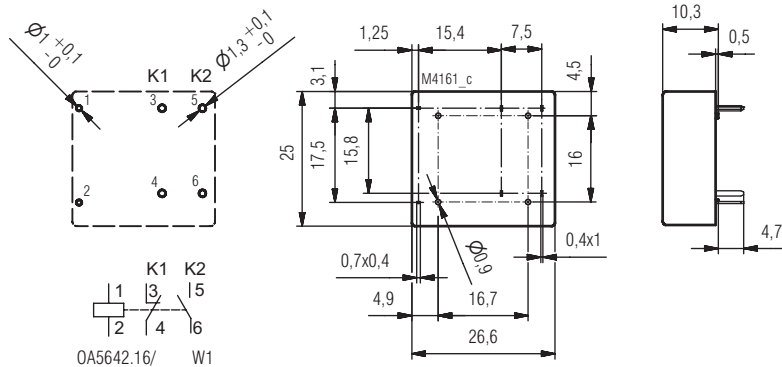


OA 5643 Dimensions, Pin Configuration, Connection Diagrams

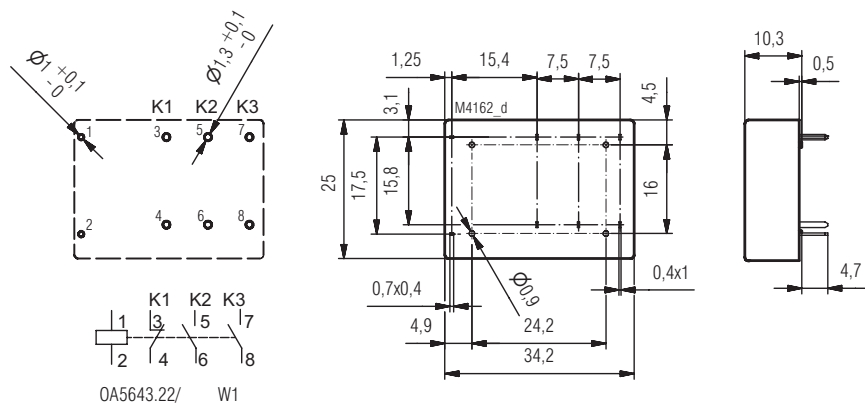

OA 5644 Dimensions, Pin Configuration, Connection Diagrams

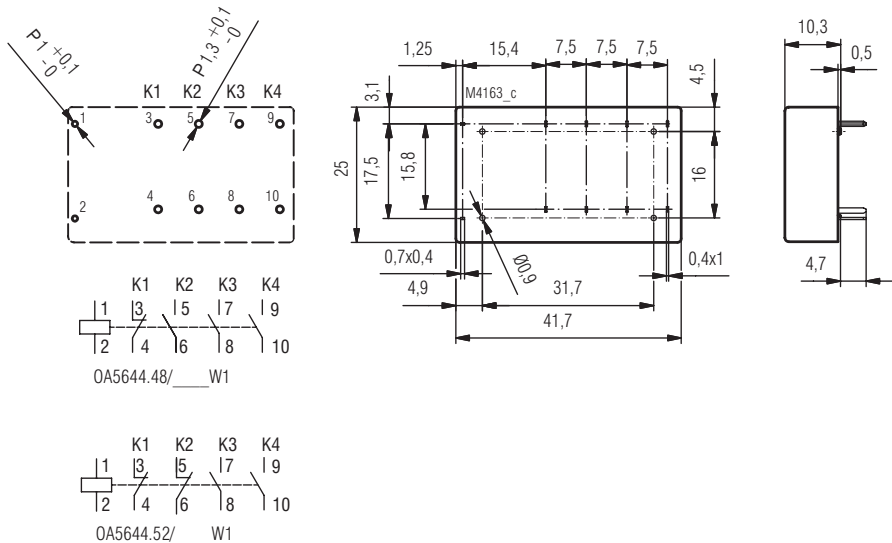

Notes

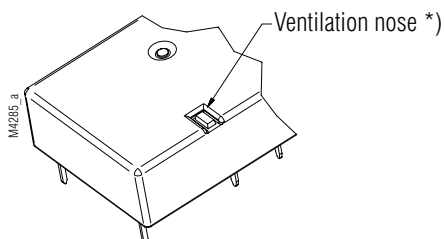

*) When using the maximum switching capacity it is recommended to open the relay at the indicated position.