



Industrial Automation - Products & Configurations

HT5000/S0 BASIC SYSTEM

Basic Configuration	LCD TFT 15" • Touch-Screen • Intel® Celeron™ dual core 1020E 2,20 GHz • 2GB RAM • Aluminum front panel • VGA video output for additional external monitor • isolated 24V DC power supply • 12 months warranty
---------------------	---

HT5000/S1 BASIC SYSTEM

Basic configuration	LCD TFT 15" • Touch-Screen • Intel® Celeron™ dual core 1020E 2,20 GHz • 2GB RAM • Aluminum front panel • VGA video output for additional external monitor • isolated 24V DC power supply • 1 PCI slot • 12 months warranty
---------------------	--

HT5000/S3 BASIC SYSTEM

Basic configuration	LCD TFT 15" • Touch-Screen • Intel® Celeron™ dual core 1020E 2,20 GHz • 2GB RAM • Aluminum front panel • VGA video output for additional external monitor • isolated 24V DC power supply • 3 PCI slot • 12 months warranty
---------------------	--

PROCESSOR	S0 S1 S3	Intel® Celeron™ dual core 1020E • 2,20 GHz • 2MB smart cache • 2 cores, 2 threads • TDP 35W • socket PGA988
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	Intel® Core™ i3-3120ME • 2,40 GHz • 3MB smart cache • 2 cores, 4 threads • TDP 35W • socket PGA988
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	Intel® Core™ i5-3610ME • 2,70 GHz • 3MB smart cache • 2 cores, 4 threads • TDP 35W • socket PGA988
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	Intel® Core™ i7-3610QE • 2,30 GHz • 6MB smart cache • 4 cores, 8 threads • TDP 45W • socket PGA988

DISPLAY	S0 S1 S3	15" LCD TFT 4:3 • XGA, 1024x768, 16M colors • backlight LED, 450 cd/m ² • Viewing angle: L:R/U:L (typ): 80°:80°/70°:70°
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	15,6" LCD TFT 16:9 • 1366x768 (HD), 16M colors • backlight LED, 300 cd/m ² • Viewing angle L:R/U:L (typ): 85°:85°/80°:80°
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	17" LCD TFT 5:4 • SXGA, 1280x1024, 16M colors • backlight LED, 350 cd/m ² • Viewing angle L:R/U:L (typ): 85°:85°/80°:80°
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	18,5" LCD TFT 16:9 • 1366x768 (HD), 16M colors • backlight LED, 300 cd/m ² • Viewing angle L:R/U+L (typ): 170°/160°
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	19" LCD TFT 5:4 • SXGA 1280x1024, 16M colors • backlight LED, 350 cd/m ² • Viewing angle L:R/U:L (typ): 89°:89°/89°:89° MVA
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	21,5" LCD TFT 16:9 • 1920x1080 (FHD), 16M colors • backlight LED, 300 cd/m ² • Viewing angle L:R/U:L (typ): 89°:89°/89°:89° MVA

TOUCH-SCREEN	S0 S1 S3	No Touch-Screen	GFG > note 1
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	15" Touch-Screen • 5 wires resistive technology • Controller integrated on board	-
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	15,6" Touch-Screen • 5 wires resistive technology • Controller integrated on board	yes
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	17" Touch-Screen • 5 wires resistive technology • Controller integrated on board	no
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	18,5" Touch-Screen • 5 wires resistive technology • Controller integrated on board	yes
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	19" Touch-Screen • 5 wires resistive technology • Controller integrated on board	no
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	21,5" Touch-Screen • 5 wires resistive technology • Controller integrated on board	no

RAM MEMORY	S0 S1 S3	2 GB • 1 module SODIMM DDR3-1600
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	4 GB • 1 module SODIMM DDR3-1600
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	8 GB • 1 module SODIMM DDR3-1600
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	16 GB • 2 x 8 GB modules SODIMM DDR3-1600

INTERNAL PSU	S0 S1 S3	24V DC isolated without UPS (uninterruptible power supply)
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	24V DC isolated with UPS (uninterruptible power supply) • integrated in power supply section • batteries kit not included > note 2
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	115V÷230V AC • 180W • autoranging
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	115V÷230V AC • 220W • autoranging

RAID	S0 S1 S3	RAID 0, 1
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	

EXTERNAL MONITOR OUTPUT	S0 S1 S3	VGA (DB15F) video interface for additional external monitor • Max resolution 2048x1536 SXGA
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	DVI-I (Dual Link) video interface for additional external monitor • Max resolution 2048x1536 SXGA

EXPANSION SLOTS	S0 S1 S3	No expansion slots
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	1 x PCI half size • on riser card • expansion board with max consumption 5W
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	1 x PCIe x4 format (Generation 2) half size • on riser card • expansion board with max consumption 5W
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	3 x PCI half size • on riser card • expansion board with max consumption 5W
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	2 x PCI + 1 x PCIe x4 format (Generation 2) half size • on riser card • expansion board with max consumption 5W
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	

OPTIONS			
TPM	S0 S1 S3	TPM (Trusted Platform Module)	
SSD mSATA	S0 S1 S3	SSD mSATA (U110/X110), SATA 3, 6Gb/s (Solid State Disk), MLC	
SSD 2,5"	S0 S1 S3	1 x SSD 2,5" SATA installation kit (SSD not included)	
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	2 x SSD 2,5" SATA installation kit (SSD not included)	
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	SSD 2,5" U/X110 SATA 3, 6Gb/s (Solid State Disk), MLC	
HDD 2,5"	S0 S1 S3	1 x HDD 2,5" SATA installation kit (HDD not included) • with shock absorber	
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	2 x HDD 2,5" SATA installation kit (HDD not included) • with shock absorber	
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	HDD 2,5" SATA	
2,5" EXTRACTABLE DRAWER KIT	S0 S1 S3	1 x HDD/SSD 2,5" SATA extractable drawer kit (HDD/SSD not included) • with shock absorber • with drawer	
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	2 x HDD/SSD 2,5" SATA extractable drawers kit (HDD/SSD not included) • with shock absorber • with drawers	
CFAST	S0 S1 S3	Cfast SATA	
COMMUNICATION PORTS	S0 S1 S3	1 x RS232/422/485 serial port (DB15M) • 1 x USB 2.0 port > note 3	
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	1 x RS232/422/485 optoisolated serial port (DB15M) • 1 x USB 2.0 port > note 3	
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	2 x RS232 serial ports (DB9M) > note 3	
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	2 x USB 2.0 ports > note 3	
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	1 x Ethernet 10/100/1000Mbps, Intel® 82574L > note 3	
UPS BATTERIES KIT	S0 S1 S3	Batteries kit for rear systems mounting • cable included	
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	Batteries kit for detached mounting (wall mount) • 100cm cable included	
FIELDBUS	S0 S1 S3	NETcore® X MiniAPCI fieldbus module • For technical details and supported drivers see pg.169 > note 4	
WARRANTY EXTENSION	S0 S1 S3	Warranty extension to 18 months on basic system and its variants	
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	Warranty extension to 24 months on basic system and its variants	
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	Warranty extension to 36 months on basic system and its variants	




NOTES

- 1: Glass Film Glass (GFG) touch-screen option: see pg.167 for the differences with standard touch-screen configuration
- 2: UPS functionalities are ensured with Microsoft Win32/64bits operating systems only
The UPS can be used with Intel® Core™ i7-3610QE processor only in S0 version.
- 3: Communication ports cannot be installed together
- 4: Boards with MiniPCI / MiniPCI bus cannot be installed together

TECHNICAL SPECIFICATIONS

Case	Panel mount	
Overall dimensions & weight	See details on the related section	
Front panel	Aluminum • ASEM logo sticker	
Touchscreen	5 wires resistive technology • on board controller	
Frontal protection	IP66	
Power supply	24V DC 115V/230V AC	Input voltage: 18÷32V DC • Isolated Input voltage: 85÷264V AC • autoranging • S0, S1: 180W; S3: 220W
UPS (optional only for S0 and S1)	12V DC UPS (Uninterruptible Power Supply) battery backup system Batteries module (optional): Pb, 12V/13A max, 2500mAh • Charge time 3h@25°C • Discharge time 5h@ 10A and 25°C • Lifetime 10years@25°C	
Motherboard	Type "All-In-One" ASEM 1121	
	Watch dog Time programmable	
Intel platform	Processor Intel® Celeron™ dual core 35W • Intel® Ivy Bridge™ third generation 35/45W Chipset Intel® HM76 Express Chipset Intel® • QM77 Express Chipset for RAID	
Operating System	Microsoft Windows 8 Pro 32/64bit • Windows 7 Pro/Ultimate 32/64bit • Windows XP Pro 32bit • Microsoft Windows Embedded 8 32/64bit • Windows Embedded Standard 7/7P 32/64 bit • Windows Embedded Standard 2009 (XPe SP3) 32bit Other operating systems, such as Linux, VxWorks, QNX, etc., have not been certified by ASEM but they are reasonably supported by the Intel platform after verification of compatibility	
O.S. certified by ASEM	Microsoft Windows 2000 / 98 / NT • Microsoft Windows CE 5 / 6	
O.S. not supported by Intel platform	Microsoft Windows 2000 / 98 / NT • Microsoft Windows CE 5 / 6	
Video controller	Intel® HD Graphics integrated in Intel® Celeron™ microprocessor • 650MHz • LVDS 8bit/color digital interface Intel® HD Graphics 4000 integrated in Intel® Core™ microprocessor • 650MHz • LVDS 8bit/color digital interface	
Video RAM (shared)	Dynamic Video Memory Technology • Memory quantity is automatically selected by operating system	
System memory	DDR3-1600 type • 2 SODIMM modules • min 2GB • max 16GB	
Mass storage interfaces	2 x SATA 3, 6Gb/s • 1 x mSATA 3, 6Gb/s • integrated on board	
TPM	2x10 (2,54) pin-strip connector for optional TPM module	
CFast slot	1 x slot CFast (bootable) external access	
Bus expansions slots	on board 2 x MiniPCI on riser card (S1) 1 x PCI or 1 x PCIe x4 • half size boards with 5W max consumption • alternative to each other on riser card (S3) 3 x PCI or 2 x PCI + 1 x PCIe x4 • half size boards with 5W max consumption • alternative to each other	
Frontal access interfaces	1 x USB 2.0	
Rear access interfaces	3 x Ethernet 10/100/1000 Mbps (RJ45 - 2 x Intel® 82574L, 1 x Intel® 82579LM) • 2 x USB 3.0 (Type A) • 2 x USB 2.0 (Type A) • 1 x PS/2 K/M • VGA or DVI-I output video (2048x1536 SXGA max resolution)	
Rear access serial interfaces	1 x RS-232 (DB9M)	
Environmental specifications	Operating temperature: 0° ± +50°C, 0°C ± +45°C with 24x7 HDD, +5°C ± +45°C with standard HDD • Storage temperature: -20° ± +60°C • Humidity: 80% (non-condensing)	
Approvals	CE (EN 55022, EN 61000-3-2/3, EN 55024, EN 60950-1) • cULus (UL-61010-2-201) pending	
Standard warranty	12 months • Warranty management by ASEM headquarters	

DIMENSIONS (mm)

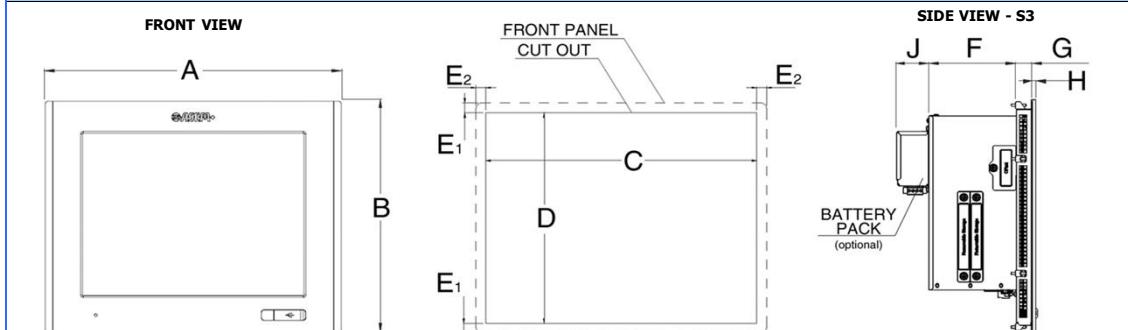

LCD TFT	A	B	C	D	E1/E2	F (S0/S1/S3)	G	H	J	Weight (kg)
15"	390	315	370	295	10/10	67/84/114	19	6	41,8	tbd
15,6"	430	275	410	255	10/10	67/84/114	19	6	41,8	tbd
17"	455	355	435	335	10/10	67/84/114	21	6	41,8	tbd
18,5"	500	320	480	300	10/10	67/84/114	21	6	41,8	tbd
19"	490	388	470	368	10/10	67/84/114	23	6	41,8	tbd
21,5"	579	367	559	347	10/10	67/84/114	23	6	41,8	tbd

